

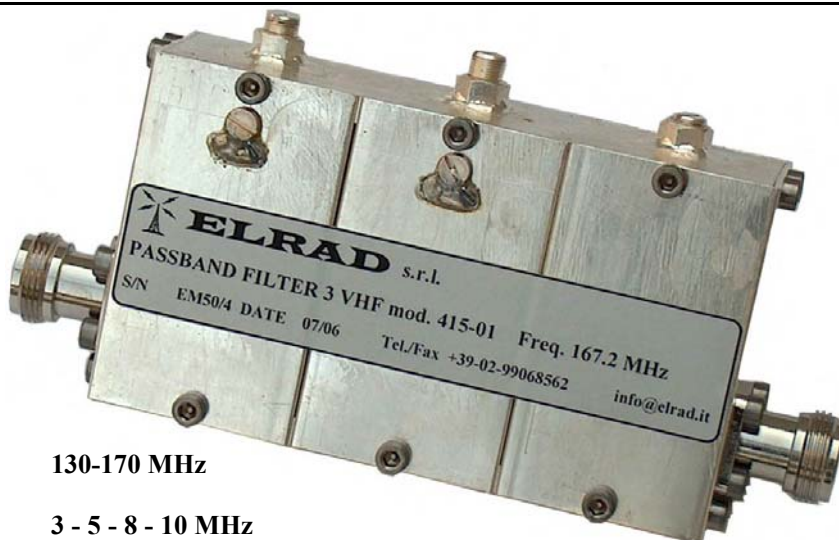


VHF VERSION mod. 415-01



OPERATING FREQUENCY		130-170 MHz
BANDWIDTH	1 dB	3 - 5 - 8 - 10 MHz
ATTENUATION		
	+/- 1 BW	15 dB
	+/- 2 BW	35 dB
	+/- 3 BW	40 dB
	+/- 4 BW	45 dB
INSERTION LOSS		1.2 dB
CONNECTORS		2 x N Female 50 Ohm
VSWR		1.3 17 dB
RATED POWER		50 W
DIMENSIONS		145 x 75 x 42 mm.
OPERATING TEMPERATURE		- 20 / + 70 °C
FINISHING		silver plated brass

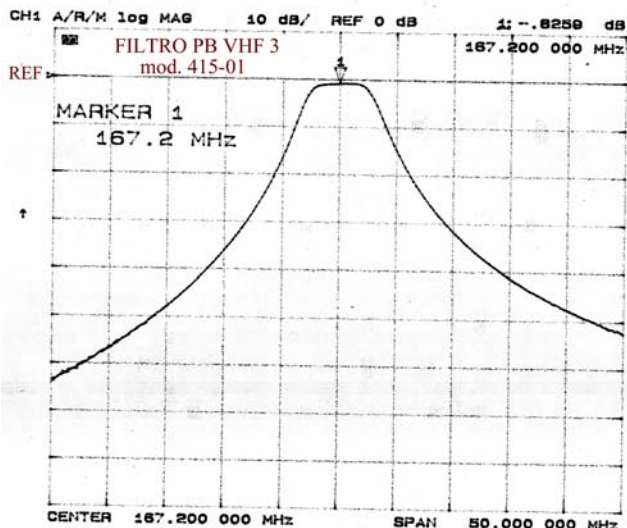

ELRAD srl

Via Ugo Foscolo, 8 20024 GARBAGNATE MILANESE MI ITALY

Tel. 02-99068562

Fax 02-99068562

Email info@elrad.it

TITOLO/TITLE

FILTRO PASSABANDA / PASSBAND FILTER VHF-UHF 3 CAVITY



DISEGNI E DOCUMENTI DI PROPRIETA' DI
ELRAD srl.
 DIFFUSIONE E RIPRODUZIONE VIETATA
 A TERMINI DI LEGGE.

CODICE/CODE

415ACA2A.PUB

PREPARED A. Benedetti

DATA/DATE

04/06

REV.

A

PAG./PAGE



1/2

APPROVED I. Marini

UHF VERSION mod. 415-02



OPERATING FREQUENCY		430-470 MHz
BANDWIDTH	1 dB	3 - 5 - 8 - 10 MHz
ATTENUATION		
	+/- 1 BW	20 dB
	+/- 2 BW	40 dB
	+/- 3 BW	50 dB
	+/- 4 BW	60 dB
INSERTION LOSS		1.8 dB
CONNECTORS		2 x N Female 50 Ohm
VSWR		1.3 17 dB
RATED POWER		50 W
DIMENSIONS		185 x 82 x 32 mm.
OPERATING TEMPERATURE		- 20 / + 70 °C
FINISHING		silver plated brass

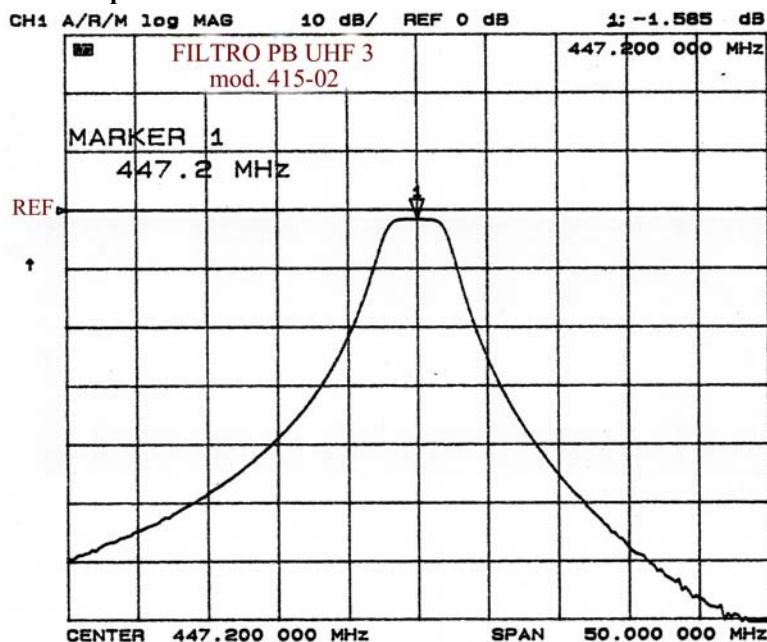

ELRAD srl

Via Ugo Foscolo, 8 20024 GARBAGNATE MILANESE MI ITALY

Tel. 02-99068562

Fax 02-99068562

Email info@elrad.it

TITOLO/TITLE

FILTRO PASSABANDA / PASSBAND FILTER VHF-UHF 3 CAVITY



DISEGNI E DOCUMENTI DI PROPRIETA' DI
ELRAD srl.
 DIFFUSIONE E RIPRODUZIONE VIETATA
 A TERMINI DI LEGGE.

CODICE/CODE

415ACA2A.PUB

PREPARED A. Benedetti

DATA/DATE

04/06

REV.

A

PAG./PAGE

2/2

APPROVED I. Marini