



## VHF VERSION mod. 418-01



<b>OPERATING FREQUENCY</b>		130-170 MHz
<b>BANDWIDTH</b>	1 dB	PB 5 MHz SB 250 KHz
<b>ATTENUATION</b>		PB 4 cavity filter (415ACA2A.pub) SB 30 dB (35 dB typ.)
<b>INSERTION LOSS</b>		1.5 dB
<b>CONNECTORS</b>		2 x N Female 50 Ohm
<b>VSWR</b>		1.3 17 dB
<b>RATED POWER</b>		50 W
<b>DIMENSIONS</b>		180 x 80 x 80 mm.
<b>OPERATING TEMPERATURE</b>		- 20 / + 70 °C
<b>FINISHING</b>		silver plated brass

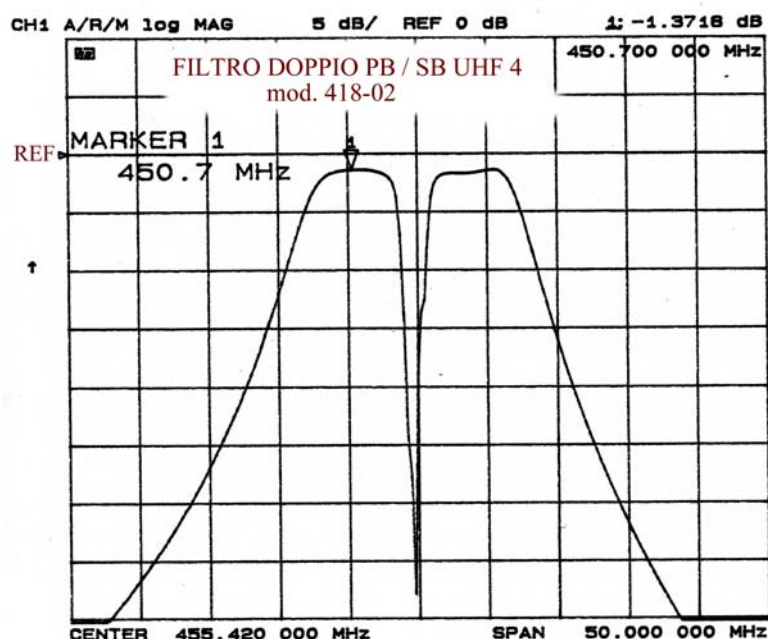

**ELRAD** srl

Via Ugo Foscolo, 8 20024 GARBAGNATE MILANESE MI ITALY

Tel. 02-99068562

Fax 02-99068562

Email info@elrad.it

TITOLO/TITLE

FILTRO DOPPIO / DOUBLE FILTER PB / SB 4 CAVITY VHF / UHF



DISEGNI E DOCUMENTI DI PROPRIETA' DI  
**ELRAD** srl.  
DIFFUSIONE E RIPRODUZIONE VIETATA  
A TERMINI DI LEGGE.

CODICE/CODE

418ACA2A.PUB

PREPARED A. Benedetti

DATA/DATE

REV.

PAG./PAGE

APPROVED I. Marini

04/06


A

1/2

## UHF VERSION mod. 418-02



<b>OPERATING FREQUENCY</b>	<b>430 -470 MHz</b>
<b>BANDWIDTH</b> 1 dB	<b>PB 10 MHz SB 500 KHz</b>
<b>ATTENUATION</b>	<b>PB 4 cavity filter (415ACA2A.pub) SB 30 dB (35 dB typ.)</b>
<b>INSERTION LOSS</b>	<b>1.5 dB</b>
<b>CONNECTORS</b>	<b>2 x N Female 50 Ohm</b>
<b>VSWR</b>	<b>1.3    17 dB</b>
<b>RATED POWER</b>	<b>50 W</b>
<b>DIMENSIONS</b>	<b>240 x 110 x 75 mm.</b>
<b>OPERATING TEMPERATURE</b>	<b>- 20 / + 70 °C</b>
<b>FINISHING</b>	<b>silver plated brass</b>

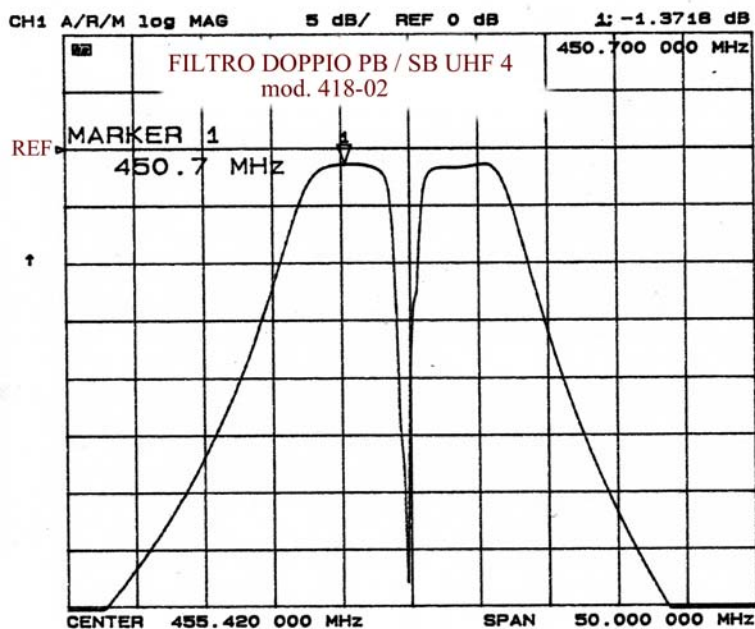


**ELRAD** srl  
 Via Ugo Foscolo, 8 20024 GARBAGNATE MILANESE MI ITALY  
 Tel. 02-99068562      Fax 02-99068562      Email info@elrad.it



**TITOLO/TITLE**  
**FILTRO DOPPIO / DOUBLE FILTER PB / SB 4 CAVITY VHF / UHF**

<b>DISEGNI E DOCUMENTI DI PROPRIETA' DI</b> <b>ELRAD</b> srl. <b>DIFFUSIONE E RIPRODUZIONE VIETATA</b> <b>A TERMINI DI LEGGE.</b>	<b>CODICE/CODE</b> 418ACA2A.PUB		
	PREPARED A. Benedetti APPROVED I. Marini	<b>DATA/DATE</b> 04/06	<b>REV.</b> A